




Factory Authorized Water Supplies for the Water Injector System™



The Water Injector System™ fills a battery in 15 seconds. To provide this fast fill each Injector can take up to 1/2 gallon per minute (minimum 25 psi). A gravity fill tank or standard garden hose from faucet will not work. These Factory authorized water supplies provide water for your batteries at the correct pressure.

We have developed a wide variety of world class water supplies to provide the ideal fit for every application with options based on your operations and power availability.


When used with one of our Water Supplies, the Water Injector System provides an 8 to 1 speed advantage and legendary reliability. Make battery watering convenient and problem free by selecting one of our factory authorized water supplies.

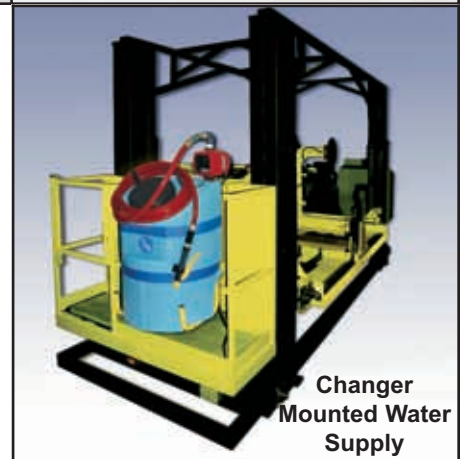

Choose the Ideal Water Supply for Your Operation

<p>HydroCart: A/C Powered Mobile Water Supplies</p>		<p>BladderTank: Pressurized Mobile Water Supply</p>
<p>Features</p> <ul style="list-style-type: none"> • Sturdy polypropylene tank • Robust submersible pump provides the volume and pressure required by the Water Injector System™ • Plug into any 110 VAC outlet • Switch activates pump • Includes the Instant Valve PRO, with built-in flow indicator, shows when the Injectors have shut off and it is time to disconnect. 		<p>Features</p> <ul style="list-style-type: none"> • Requires no power -Unlimited range • Sturdy heavy duty steel tank • Fill by attaching the input hose to your building's water supply • Includes the Instant Valve PRO, with built-in flow indicator, shows when the Injectors have shut off and it is time to disconnect.
		
<p>HydroCart™ Max Product Specifications</p> <p>Part No. D-INJ-HCT Capacity: 20 gallons Range: 45 feet Empty weight: 64 lb. Wheel size: 8 in. Power cord length: 25 ft. Output hose: 20 ft 5/8" high-output hose Dimensions: H 45" x W 20" x D 20"</p>	<p>HydroCart™ Mini Product Specifications</p> <p>Part No. D-INJ-MINI Capacity: 8 gallons Range: 23 feet Empty weight: 31 lb. Wheel size: 8 in. Power cord length: 13 ft. Output hose: 10 ft kink resistant hose Dimensions: H 35" x W 15" x D 16"</p>	<p>BladderTank™ Mini Product Specifications</p> <p>Part No. D-INJ-T10M Capacity: 10 gallons Range: Unlimited Dimensions: H 41" x W 17" x D 17" Empty weight: 59.9 lb. Input hose: 9 ft Output hose: 10 ft Wheel size: 8 in.</p>

Additional Water Supplies

	<p>Changer Mounted Water Supply</p> <ul style="list-style-type: none"> • Sturdy polypropylene tank cradled in a powder-coated industrial steel frame. • Mounts directly on to most battery changers. • Robust submersible pump draws 110 VAC power from the battery changer. • Includes the Instant Valve PRO. • Controller prevents run-dry situations and shuts off the pump after 10 seconds of non-use. 		<p>DirectFill™</p> <ul style="list-style-type: none"> • 20 foot rugged industrial hose • Sediment filter. • Pressure regulator • Includes the Instant Valve PRO, with built-in flow indicator, shows when the Injectors have shut off and it is time to disconnect.
<p>Product Specifications Part No. D-INJ-PMWT-WOT Capacity: 20 gallons Dimensions: H 41" x W 29" x D 27"</p>	<p>Weight: 68 lb. Output hose: 20 ft Power cord: 25ft Electrical Requirements: 8.5 amps 110 VAC</p>	 <p>Flow Checker</p>	<p>Product Specifications Part No. D-INJ-DF Range: 20 ft. Empty weight: 6.5 lbs.</p> <p>Water source must be qualified with a Flow Checker (D-INJ-FC).</p>

For Sales or Service Call 1-800-DOUGLAS

70.12 06/10 © 2010 Douglas Battery. All rights reserved. Trademarks and logos are the property of Douglas Battery and its affiliates unless otherwise noted. HydroCart, BladderTank and DirectFill are trademarks of Philadelphia Scientific LLC. Subject to revisions without prior notice. E&O.E.



DOUGLAS BATTERY
Winston-Salem NC 27107
www.douglasbattery.com

